2000 ANSI LUMENS

LIGHTWEIGHT 6.8 LBS.

PICTURE IN PICTURE

BOXLIGHT

CD-7/25C


The BOXLIGHT CD-725c sets the standard for brightness and features in a portable XGA projector. No compromises were allowed when this unit was envisioned. This multimedia projector features DLP™ technology, 2000 lumens and 600:1 contrast ratio for astonishingly crisp and clear images for all of your presentations. For your convenience, Picture in Picture, digital keystone adjustment, digital zoom imaging and a variety of inputs and monitor loop-through are included as standard features of this powerful projector. Ultra Quiet at 34dB, the CD-725c will never upstage you. Call the digital projector specialists at BOXLIGHT.

19332 Powder Hill Place Poulsbo, Washington 98370 800.762.5757 360.779.7901 www.boxlight.com



BOXLIGHT

CD-725c

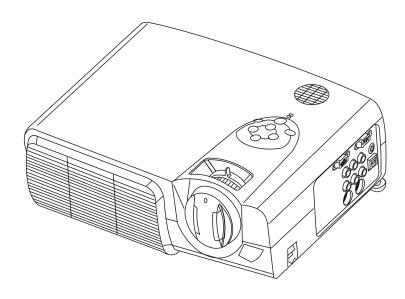



- 2000 ANSI lumens shines brightly in well-lit rooms
- Portable 6.8 pounds
- 600:1 contrast ratio creates extraordinary image definition
- Ultra-quiet 34dB noise rating so you don't have to shout to be heard
- HDTV compatibility 1080i and 720p
- Digital zoom imaging allows you to see the fine details up close
- Remote control with built-in laser pointer gives you a professional edge
- Monitor loop-through for ease of use with desktop computers
- Picture in Picture creates flexibility in training environments
- Digital keystone adjustment provides square images in any environment
- All BOXLIGHT projectors feature the latest in technology and design.
- Lifetime 24/7 technical support.
- The fastest response time in the industry from our state-of-the-art service center.



To contact BOXLIGHT:

 Direct
 800.762.5757

 Rental
 800.736.6954

 Education
 800.689.6676

 Government
 800.497.4009

 International
 360.779.7901

 Toll Free FAX
 888.353.4242

 Internet
 www.boxlight.com

Resolution	1024 x 768 XGA with compression up to 1280 x 1024 SXGA	Dimensions	12.1"/30.8cm (W) x 3.7"/9.5 cm (H) x 9.4"/24 cm (D)
Brightness	2000 ANSI lumens	Horiz. Scan Frequency	20-88 kHz
Lamp	210 watt, NSH	Vertical Refresh Rate	20-100 Hz
Display Type	0.7" DMD™ XGA chip	Projection Lens	Manual zoom and focus, 1:1.2 zoom ratio, F/2.6-3.1, f=23-27.6 mm
Contrast Ratio	600:1	Diagonal Image Size	22-300 in / 56-760 cm
Colors	16.7 million	Throw Distance	2.6-32.8 ft / 0.8-10.0 m
Aspect Ratio	4:3, 16:9 compatible	Keystone	Digital adjustment of +/- 7 degrees
Inputs	Computer: (1) 15-pin. Video: (1) RCA composite, (1) S-video, (1) Component	Adjustments	On-board and remote
	(RCA-type). Audio: (1) RCA (L/R), (1) computer mini-jack	Power Supply	100V-240V; 50/60 Hz
Outputs	Computer: (1) 15-pin. Control Port: for RS-232 control, USB for mouse	Power Consumption	330 watts
	operation	Compatibility	SXGA, XGA, SVGA, VGA, Mac
Audible Noise	34 dB	Warranty	Two-year parts and labor (120-day lamp warranty)
Audio	(1) built-in 3 watt speaker	Accessories Included	Remote control with built in laser pointer. Cables: VGA, Composite RCA A/V,
Video	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM		S-video, Component video, Audio mini-jack, USB mouse. Power Cords: US,
HDTV/EDTV	Compatibility: 1080i, 720p, 480p		Euro, UK. Soft carry case.
Weight	6.8 lb / 3.1 kg	Optional Accessories	Ceiling mount plate, suspension pole, round flush mount kit, lamp, various
FCC Rating	Class B Certification	,	screens and carrying cases.