



B O X L I G H T

CP-18t CP-315t

The **BOXLIGHT CP-18t AND CP-315t** are **BRIGHT** and full of **PREMIUM FEATURES**. These projectors are easy to set up and the **FULL-FUNCTION LASER REMOTE MOUSE** allows you to square up your image vertically and horizontally. **DIGITAL ZOOM IMAGING** enhances an area on the screen at the touch of a button and it's **FCC CLASS B CERTIFIED** so you can take it home for a movie after your big presentation is complete. These units differ only in lumens and resolution so you can pick the projector that's right for your computer and budget. Call the experts at BOXLIGHT today!

19332 Powder Hill Place
Poulsbo, Washington 98370
800.762.5757
360.779.7901
www.boxlight.com


 **BOXLIGHT**[®]
Presenting a Better Way

BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © Copyright BOXLIGHT Corporation, 2002. All other marks are the property of their respective owners. Specifications subject to change without notice. M1-CP-18t & CP-315t-8/02

BOXLIGHT

CP-18t CP-315t

projectors

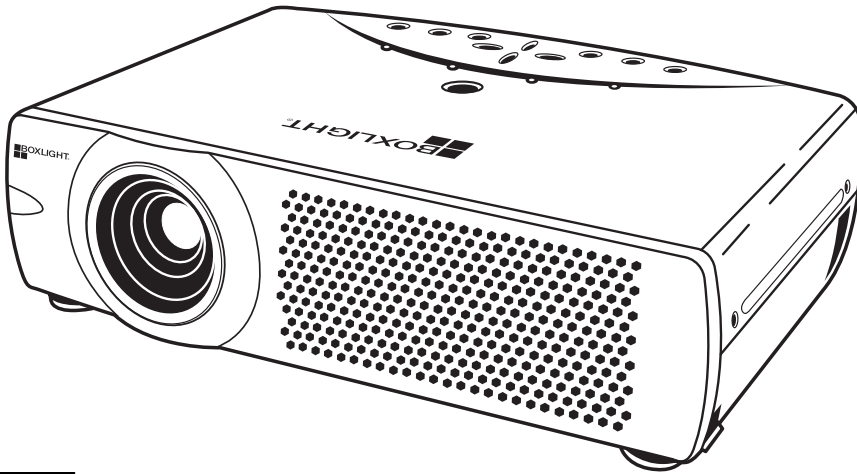

**Business
Finance**

- *Optional wireless connectivity.*
- *Optional PC card slot.*
- *CP-315t is native XGA resolution and 2000 lumens. CP-18t is native SVGA resolution and 1800 lumens.*
- *Horizontal and vertical digital keystone adjustment.*
- *Power zoom and focus.*
- *Digital zoom imaging.*
- *HDTV compatibility.*
- *Multiple inputs.*
- *Monitor loop through.*
- *Full function laser remote mouse.*
- *All BOXLIGHT projectors feature the latest in technology and design.*
- *Lifetime 24/7 technical support.*
- *The fastest response time in the industry from our state-of-the-art service center.*

BOXLIGHT®
Presenting a Better Way

To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free FAX	888.353.4242
Internet	www.boxlight.com

Resolution	CP-315t = 1024 x 768 true XGA, with compression for 1280 x 1024 SXGA CP-18t = 800 x 600 true SVGA, with compression for 1280 x 1024 SXGA	Dimensions	13.1"/33.3 cm (W) x 3.5"/8.95 cm (H) x 10"/25.4 cm (D)
Brightness	CP-315t = 2000 ANSI lumens, CP-18t = 1800 ANSI lumens	Horiz. Scan Frequency	CP-18t= 15-80 kHz; CP-315t= 15-100 kHz
Lamp	200 watt, UHP	Vertical Refresh Rate	50-100 Hz
Display Type	(3) 0.9 in/2.3 cm TFT polysilicon LCDs (CP-315t = Micro Lens Array)	Projection Lens	Motorized zoom and focus, 1:1.3 zoom ratio, F/1.7-2.0, (f=37.3-50.8 mm)
Contrast Ratio	350:1	Diagonal Image Size	31-300 in / .79-7.6 m
Colors	16.7 million	Throw Distance	5.2-40 ft / 1.6-12.2 m
Aspect Ratio	4:3, 16:9 compatible	Keystone	Digital adjustment: Vertical: +/- 20 degrees; Horizontal: +/- 10 degrees
Inputs	Computer: (1) DVI-I digital/analog. Video: (1) S-video, (1) component video. Audio: (1) computer mini-jack, (1) RCA audio (R/L)	Adjustments	On-board and remote
Outputs	Computer: (1) 15-pin. Audio: (1) RCA audio (L/R), Control Port: (1) for mouse operation, (1) USB mouse control port	Power Supply	100-120/ 200-240V at 50-60 Hz auto change
Audio	(1) built-in 1 watt speaker	Power Consumption	300 watts
Video	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM	Compatibility	SXGA, XGA, SVGA, VGA, Mac
HDTV/EDTV	Compatibility: 1080i, 1035i, 720p, 575p, 575i, 480p	Warranty	Two-year parts and labor (120-day lamp warranty)
Weight	9.3 lb / 4.2 kg	Accessories Included	Laser remote mouse control, VGA cable, PS/2 mouse cable, lens cap, DVI/VGA adapter, soft carry bag.
FCC Rating	Class B Certification	Optional Accessories	Viewer unit with Media card imager software and 16 MB card, Wireless Imager Kit, Mac adapter, DVI-I to digital cable, serial mouse cable, Mac mouse cable, ceiling mount plate, suspension pole, flush mount kit, various carrying cases