

2000 ANSI LUMENS

SVGA RESOLUTION

HDTV COMPATIBLE



B O X L I G H T

CP-634i

Step one: **PRESENT WITH BOXLIGHT'S CP-634I PROJECTOR.** Your images are emblazoned on the screen at 2000 ANSI LUMENS to dazzle big audiences. And with that kind of brilliance, you can be confident the **CP-634I WILL BRIGHTEN ANY ROOM, EVEN UNDER AMBIENT LIGHTING CONDITIONS.** Step two: enjoy the ovation. Thanks to **CONVENIENT FEATURE LIKE DIGITAL ZOOM and KEYSTONE ADJUSTMENTS, MULTIPLE INPUTS, AND HDTV COMPATIBILITY,** your job is sure to be a blast. Call the digital projector specialists at BOXLIGHT today.

19332 Powder Hill Place

Poulsbo, WA 98370

800.762.5757

360.779.7901

www.boxlight.com

BOXLIGHT®
Presenting a Better Way


BOXLIGHT and the BOXLIGHT logo are registered trademarks of BOXLIGHT Corporation. © 2004 BOXLIGHT Corporation. All other marks are the property of their respective owners. Specifications are subject to change without notice. M1-CP634i - 02/04

B O X L I G H T

CP-634i

projector

- True 800x600 SVGA, with compression up to 1600x1200 UXGA
- 6lbs. / 2.7kg
- 2000 ANSI lumens
- Digital Keystone Adjustment on remote
- Manual zoom/focus
- Digital Zoom Imaging
- Full Function Remote control
- Component Video Input
- HDTV compatible
- FCC Class B rating

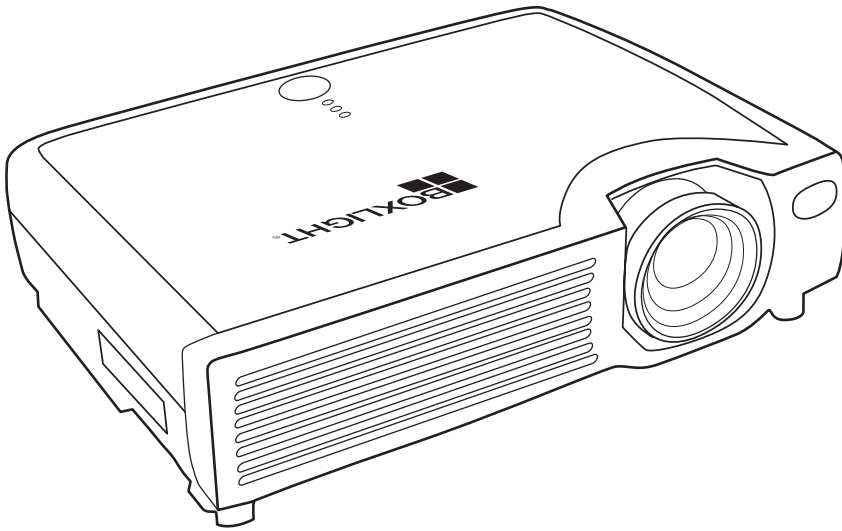

BOXLIGHT[®]
Presenting a Better Way

To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free Fax	888.353.4242
Internet	www.boxlight.com

*Several financing options available!

Resolution:	800 x 600 SVGA with compression up to 1600 x 1200 UXGA	Vertical Refresh Rate:	50-120Hz
Brightness:	2000 ANSI lumens (MAX)	Audible Noise:	38dB / 33dB in whisper mode
Lamp:	150W UHP	Audio:	1-watt mono speakers
Projection Lens:	Manual zoom & focus 1:1.2 zoom ratio, F/1.7-1.9	Video:	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, 480i, 480p, 575i, 720p, 1080i
Throw Distance:	4'-23.9' / 1.2-7.3m	Keystone:	Digital adjustment of +/- of 15° vertical and 5° horizontal
Display Type:	3-0.7" TFT polysilicon LCDs	Adjustments:	On-board and remote
Contrast Ratio:	400:1	Power Supply:	100-120/220-240V AC; 50/60Hz auto change
Colors:	16.7 million	Power Consumption:	240 watts
Aspect Ratio:	4:3, 16:9 compatible	FCC Rating:	Class B
Inputs:	Computer: (2) RGB computer (15-pin); Audio: (1) RCA x 2 audio; Video: (1) RCA component; (1) S-Video, (1) RCA composite	Dimensions (HxWxD):	3" x 11.6" x 9.1" / 7.6 x 29.5 x 23.1cm
Outputs:	Computer: (2) RGB computer (15-pin), (1) USB, (1) 15-pin D-sub control port	Weight:	6 lbs. / 2.7kg
Scan Frequency:	15-91kHz	Warranty:	Two-year parts and labor (120 days or 500 hours, whichever comes first, lamp guarantee)

Specifications are subject to change without notice.
© 2004 BOXLIGHT Corporation.