

1100 LUMENS

XGA RESOLUTION

3.8 POUNDS



B O X L I G H T

XD-15c

Move a step ahead of the competition with the **BOXLIGHT XD-15c**. This DLP™ projector weighs a mere **3.8 POUNDS** and boasts of native **XGA** resolution, **SHORT-THROW LENS** and **PICTURE IN PICTURE** functionality to move your presentations to the front of the class. Bright enough to light up a medium sized conference room, yet light enough to travel with, the XD-15c is one tool that you will reach for time and time again. **DIGITAL KEYSTONE CORRECTION** and the **MANUAL ZOOM LENS** allow you to configure the image to suit any setting and the **DLP™ TECHNOLOGY** and **600:1 CONTRAST RATIO** ensure that all of your projections will be bright and clear. Let the BOXLIGHT XD-15c perfect your competitive edge.


19332 Powder Hill Place
Poulsbo, Washington 98370
800.762.5757
360.779.7901
www.boxlight.com

 **BOXLIGHT**®
Presenting a Better Way

B O X L I G H T

XD-15C

p r o j e c t o r

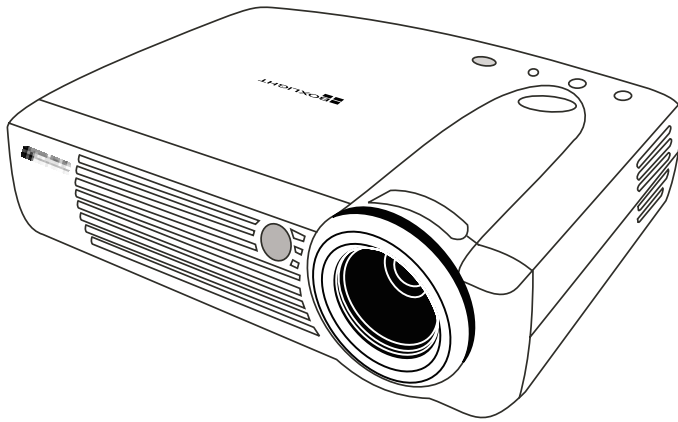

- 3.8 pounds, DLP™ technology.
- 600:1 contrast ratio.
- 1100 ANSI lumens.
- True XGA resolution with compression to SXGA.
- HDTV compatibility.
- Digital keystone correction.
- Digital zoom imaging.
- Built in speaker.
- Picture in Picture.
- Less than 36dB audible noise.
- Short-throw lens is great for small rooms.
- All BOXLIGHT projectors feature the latest in technology and design.
- Lifetime 24/7 technical support.
- The fastest response time in the industry from our state-of-the-art service center.



To contact BOXLIGHT:

Direct	800.762.5757
Rental	800.736.6954
Education	800.689.6676
Government	800.497.4009
International	360.779.7901
Toll Free FAX	888.353.4242
Internet	www.boxlight.com



Resolution	1024 x 768 XGA with compression up to 1280 x 1024 SXGA	Dimensions	8.6"/21.8 cm (W) x 2.1"/5.3 cm (H) x 6.9"/17.5 cm (D)
Brightness	1100 ANSI lumens	Horiz. Scan Frequency	20-88 kHz
Lamp	120 watt, VIP	Vertical Refresh Rate	20-100 Hz
Display Type	Single chip DLP™ - 0.7" DMD	Projection Lens	Manual zoom and focus, zoom ratio 1:1.2, F/2.6-3.1
Contrast Ratio	600:1	Diagonal Image Size	22-300 in / .56-7.6 m
Colors	16.7 million	Throw Distance	2.6-32.8 ft / 0.8-10 m
Aspect Ratio	4:3, 16:9 compatible	Keystone	Digital correction
Inputs	Computer: (1) 15-pin computer. Video: (1) S-video, (1) composite video Audio: (1) computer mini-jack	Adjustments	On-board and remote
Audible Noise	<36 dB	Power Supply	100V-120/ 200-240V; 50/60 Hz auto change
Audio	(1) built-in 1 watt speaker	Power Consumption	190 watts
Video	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM	Compatibility	SXGA, XGA, SVGA, VGA, Mac
HDTV/EDTV	Compatibility: 1080i, 720p	Warranty	Two-year parts and labor (120-day lamp warranty)
Weight	3.8 lb / 1.7 kg	Accessories Included	Ultra-slim remote control; USA, UK & Pan-Europe power cords; 3-2 power cord converter; VGA, S-video & composite video cables; VGA to component RCA adapter; RCA (L/R) to mini-jack audio cable; mini-jack audio cable; lens cap; soft carry bag
FCC Rating	Class B Certification	Optional Accessories	Mac adapter, ceiling mount accessories, spare lamp, screens, various carry cases