2500 LUMENS

XGA RESOLUTION

MULTI-PURPOSE

BOXLIGHT

CP-75

The Boxlight CP-775i brings your presentations to life. 2500

LUMENS in a 9.9 POUND package and overflowing with

FEATURES, the robust CP-775i will delight and impress you. This

well-designed multimedia projector outperforms other units of the
same weight. Professional features like vertical and horizontal

keystone correction, picture in picture and a CUSTOMIZABLE START
UP SCREEN are included with the CP-775i. BROAD INPUT

COMPATIBILITY, SXGA compression, and the convenience of an
easy-to-operate LASER POINTER REMOTE CONTROL, make the CP-775i


the professionals choice for MEDIUM TO LARGE VENUE Settings.

19332 Powder Hill Place Poulsbo, Washington 98370 800.762.5757 360.779.7901 www.boxlight.com



BOXLIGHT

CP-7751

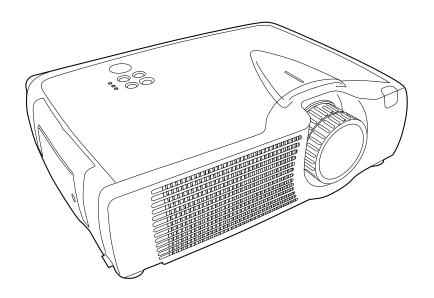



Business Finance

- Perfect for fixed installations and medium to large venues.
- 2500 lumens standard mode; 2000 lumens whisper mode.
- True XGA resolution with compression to SXGA. HDTV compatibility.
- Vertical and horizontal keystone correction.
- Digital zoom imaging.
- Multiple inputs.
- Picture in picture.
- Laser pointer remote control.
- User customizable start up screen.
- All BOXLIGHT projectors feature the latest in technology and design.
- Lifetime 24/7 technical support.
- The fastest response time in the industry from our state-of-the-art service center.



To contact BOXLIGHT

 Direct
 800.762.5757

 Rental
 800.736.6954

 Education
 800.689.6676

 Government
 800.497.4009

 International
 360.779.7901

 Toll Free Fax
 888.353.4242

Internet www.boxlight.com

Resolution	1024 x 768 true XGA, with compression for 1280 x 1024 SXGA	Dimensions	14.2"/36.0 cm (W) x 4.2"/10.6 cm (H) x 10.1"/25.7 cm (D)
Brightness	2500 ANSI lumens standard; 2000 ANSI lumens whisper mode	Horiz. Scan Frequency	31-80 kHz
Lamp	250 watt, UHB	Vertical Refresh Rate	56-120 Hz
Display Type	(3) 0.9 in/2.3 cm TFT polysilicon LCDs	Projection Lens	Manual zoom and focus, 1:1.3 zoom ratio, F/1.7-2.1, f=36.8-47.8 mm
Contrast Ratio	350:1	Diagonal Image Size	30-300 in / 76-760 cm
Colors	16.7 million	Throw Distance	4-51 ft / 1.2-15.7 m
Aspect Ratio	4:3, 16:9 compatible	Keystone	Digital adjustment
Inputs	Computer: (2)15 pin, (1)DVI-D; Audio:(1) L/R RCA, (2)computer mini-jack	Adjustments	On-board and remote
	Video: (1) RCA composite, (1) component (RCA type), (1) S-video	Power Supply	100V-240V; 50/60 Hz
Outputs	Computer: (1) 15 pin; Audio: (1) Stereo mini-jack;	Power Consumption	410 watts
	Control Port: RS-232 control and mouse operation; USB mouse control	Compatibility	SXGA, XGA, SVGA, VGA, Mac
Audible Noise	40 dB; 36 dB in whisper mode	Warranty	Two-year parts and labor (120-day lamp warranty)
Audio	(2) built-in 1-watt speakers with audio loop-through	Accessories Included	Laser pointer remote, VGA cable, PS/2 mouse cable, component video
Video	NTSC, NTSC 4.43, PAL, PAL (BGDHI), PAL-M, PAL-N, PAL-60, SECAM		cable, soft carry case, US and European power cord
HDTV/EDTV	Compatibility: 1080i, 1035i, 720p, 575i, 480p, 480i	Optional Accessories	Ceiling mount plate and suspension pole, ceiling round flush mount kit,
Weight	9.9 lb / 4.5 kg		various carry cases, audio/video cables, RF remote controls
FCC Rating	Class B Certification		
	Brightness Lamp Display Type Contrast Ratio Colors Aspect Ratio Inputs Outputs Audible Noise Audio Video HDTV/EDTV Weight	Brightness 2500 ANSI lumens standard; 2000 ANSI lumens whisper mode Lamp 250 watt, UHB Display Type (3) 0.9 in/2.3 cmTFT polysilicon LCDs Contrast Ratio 350:1 Colors 16.7 million Aspect Ratio 4:3, 16:9 compatible Inputs Computer: (2)15 pin, (1)DVI-D; Audio:(1) L/R RCA, (2)computer mini-jack Video: (1) RCA composite, (1) component (RCA type), (1) S-video Outputs Computer: (1) 15 pin; Audio: (1) Stereo mini-jack; Control Port: RS-232 control and mouse operation; USB mouse control Audible Noise 40 dB; 36 dB in whisper mode Audio (2) built-in 1-watt speakers with audio loop-through Video NTSC, NTSC 4.43, PAL, PAL (BGDHI), PAL-M, PAL-N, PAL-60, SECAM HDTV/EDTV Compatibility: 1080i, 1035i, 720p, 575i, 480p, 480i Weight 9.9 lb / 4.5 kg	Brightness 2500 ANSI lumens standard; 2000 ANSI lumens whisper mode Lamp 250 watt, UHB Vertical Refresh Rate Display Type (3) 0.9 in/2.3 cm TFT polysilicon LCDs Projection Lens Contrast Ratio 350:1 Diagonal Image Size Colors 16.7 million Throw Distance Aspect Ratio 4:3, 16:9 compatible Inputs Computer: (2)15 pin, (1)DVI-D; Audio:(1) L/R RCA, (2)computer mini-jack Video: (1) RCA composite, (1) component (RCA type), (1) S-video Power Supply Outputs Computer: (1) 15 pin; Audio: (1) Stereo mini-jack; Power Consumption Control Port: RS-232 control and mouse operation; USB mouse control Audible Noise 40 dB; 36 dB in whisper mode Warranty Audio (2) built-in 1-watt speakers with audio loop-through Video NTSC, NTSC 4.43, PAL, PAL (BGDHI), PAL-M, PAL-60, SECAM HDTV/EDTV Compatibility: 1080i, 1035i, 720p, 575i, 480p, 480i Weight 9.9 lb / 4.5 kg