

Brightness
 ▶ 5000 ANSI lumens
 ▶ 90% brightness uniformity across the screen

Contrast Ratio (1.5-2.2:1 zoom lens)
 ▶ 350:1 ANSI, 400:1 full field

Resolution/Digital Processing
 ▶ 3 chip 0.9" DMD™, (Digital Micromirror Device) system
 ▶ True XGA 1024x768 chip resolution
 ▶ 13 bit user selectable gamma table
 ▶ More than 1 billion displayable colors

Dynamic Scaling
 ▶ Resizing capabilities to scale down from 1600x1200 and up from 640x480 to the XGA resolution of DMD
 ▶ Independent horizontal and vertical size adjustment for graphics and video inputs

Horizontal Frequency Range
 ▶ 15 to 120 kHz

Vertical Frequency Range
 ▶ 24 to 120 Hz

Field Interchangeable Optional Lenses
 ▶ Fixed short throw lens: 1.2:1
 ▶ Zoom lenses: 1.5-2.2:1, 2.2-4:1, and 4-7:1
 ▶ Up to 130% of vertical lens offset for off-axis projection
 ▶ Up to 80% of horizontal lens offset
 ▶ Compatibility with VistaGRAPHX lenses: 0.8:1, 2.5-4:1, 4-7:1 (adapter required)
 ▶ Screen size 1.5m - 12.2m (5ft - 40ft) diagonal

Lens Mount
 ▶ Manual horizontal and vertical lens offset, focus and zoom adjustments
 ▶ Lens "bayonet-style" insertion system
 ▶ Lens mount tilt adjustment
 ▶ Built-in light shutter

Inputs
 ▶ Built-in RGB/YUV/YPbPr inputs allowing separate H and V syncs, composite sync and sync-on-green/luma (5 BNC connectors)
 ▶ Multi-standard Video Decoder Module (NTSC 3.58, NTSC 4.43, PAL, PAL 60, PAL M, PAL N, SECAM) with one composite video input (BNC and RCA connectors) and one S-video input (two BNC and 4-pin mini-DIN connectors)

Built-in Audio Control Module with 4 stereo audio inputs and 1 stereo output (RCA connectors)
 ▶ Slot for an optional input module
 ▶ Full compatibility with Marquee Signal Switcher and third-party switchers

HDTV/DTV Compatibility
 ▶ Full HDTV/DTV compatibility on analogue RGB/YPbPr inputs
 ▶ Accepts 480i, 480p, 576i, 576p, 720p, 1035i, and 1080i formats at all applicable frame/field rates
 ▶ Accepts 1080p at 24, 25 and 30 Hz frame rates
 ▶ Optional HDTV Serial Digital Input Module

Various Keypads
 ▶ Standard hand-held IR backlit remote keypad, front and rear infrared sensors
 ▶ Built-in backlit keypad
 ▶ Optional RS422 two-way remote controller with LCD display using 6 pin XLR connector with range of 600ft (183m)
 ▶ Optional wired backlit remote keypad with 3 pin XLR connector

Control / Networking
 ▶ Third party control system and switcher compatibility
 ▶ Dual RS232 ports for computer control, with loop through for connection of multiple projectors
 ▶ Dual 6 pin XLR RS422 ports for connection of optional LCD two-way controllers and loop-through to multiple projectors up to 600ft (183m)

Diagnostics
 ▶ Built-in LCD diagnostic display indicates operational status and error messages
 ▶ Power and Status LED
 ▶ Full diagnostics through RS232 9 pin D connector

Graphical User Interface
 ▶ Auto Set-up feature
 ▶ "Direct Access" intuitive user interface for complete projector control in 5 world languages
 ▶ On screen user movable menus to fit different image aspect ratios (4:3, 5:4, 16:9, etc.)
 ▶ On screen help menus
 ▶ 100 channel memories
 ▶ Auto power feature

Lamp Specification/Color Temperature
 ▶ 1200W CERMAX® Xenon illumination system
 ▶ Pre-aligned lamp module
 ▶ Constant color temperature over the lamp life
 ▶ Color temperature adjustment range: 3200°K to 9300°K
 ▶ User replaceable lamp within 5 minutes
 ▶ Typical lifetime: 1,000 hours

Power Requirements
 ▶ Line voltage 220V AC to 240 VAC +/- 10% @ 50/60 Hz
 ▶ Power consumption: 1700 W maximum
 ▶ Thermal dissipation: 5840 BTU/hr
 ▶ Operating current: 8.5A maximum

Variable Lamp Power Supply/Light Output Control (LiteLOC™)
 ▶ "Auto Brightness" mode to maintain constant brightness over time
 ▶ "Lamp Conserve" mode to extend the lamp life
 ▶ "Max Brightness" mode for maximum light output

Weight and Size
 ▶ 39.9kg (88lbs)
 ▶ 56.6cm (W) x 76.5cm (L) x 30.2cm (H)
 ▶ 22.28"(W) x 30.1" (L) x 11.88" (H)

Standard Accessories
 ▶ IR remote keypad with batteries
 ▶ User's Manual with warranty card
 ▶ 2.44m (8ft) line cord

Optional Accessories
 ▶ Serial Digital Input (SMPTE 259M/CCIR 601) with loop through feature
 ▶ Digital HDTV Input module (with loop through feature) compatible with all known HDTV formats
 ▶ DVI/DFP Input module
 ▶ 10 bit ADP (Advanced Digital Processing) module
 ▶ Wired remote keypad
 ▶ Motorized lens mount upgrade
 ▶ Compatible with all Marquee Input modules
 ▶ RS422 Two-way remote LCD controller
 ▶ Replacement lamp module

Remote infrared sensor
 ▶ Service Manual
 ▶ Librarian communication software
 ▶ Transit case

Regulatory Approvals
 ▶ CSA, UL and European safety approvals
 ▶ North American and European EMI/EMC approvals

Warranty
 ▶ One year parts and labor
 ▶ Accessories: One year



Due to constant research, specifications are subject to change without notice



Locations worldwide

ImagePoint
 58 Suttons Park Avenue,
 Reading, Berkshire, RG6 1AZ
 United Kingdom
 Tel: +44 (0) 118 926 6300
 Fax: +44 (0) 118 926 6322

Hohenzollernstraße 124-126
 41061 Mönchengladbach
 Germany
 Tel: +49 (0) 2161 664540
 Fax: +49 (0) 2161 664546

809 Wellington Street North,
 Kitchener ON
 Canada, N2G 4Y7
 Tel: +1(519) 744-8005
 1-800-265-2171
 Fax: +1(519) 749-3136

10550 Camden Drive,
 Cypress CA 90630
 USA
 Tel: +1(714) 236-8610
 1-800-407-7727
 1-800-333-3816
 Fax: +1(714) 503-3375

627A Aljunied Road
 #05-02 Biztech Centre
 Singapore 389842.
 Tel: +65 877-8737
 Fax: +65 877-8747

WorldWide Web Address: <http://www.christiedigital.com>



When image is everything...



NASA Space Center - USA



20TH Century Fox - USA



MGM Post Production - USA

If image is everything to you, then the new Vista X5 has everything you need. More than 1 billion displayable colors can be re-created to project the most resplendent and striking visuals, courtesy of the very latest in 3-chip DLP™.

A 13-bit user selectable gamma table combines 5,000 ANSI lumens of bright light, to deliver pixel perfect color accuracy. The Vista X5 uses a CERMAX® Xenon illumination system to ensure the same color and brightness uniformity is delivered time after time, after time.

The Vista X5 shares a common modular architecture with all the other models in the Vista range. If your projection needs change, your Vista X5 projection system can change to meet them. The X5 can be upgraded at only an incremental cost and deliver stunning true SXGA resolution images.

Compatible with the widest range of sources and supported by a complete range of both fixed and zoom lenses, the Vista X5 can present all your material to stunning effect for a variety of fixtures and installations.

We would never offer our clients image without substance and the Vista X5 is brimming with features that make for both simple and complete control of your presentations. Furthermore the Vista X5 offers reliability and serviceability second to none. So the Vista X5 makes your images look great, but makes you look even better.




NDR Hannover Studio - Germany



Kulturkaufhaus - Berlin, Germany



Emerson - USA

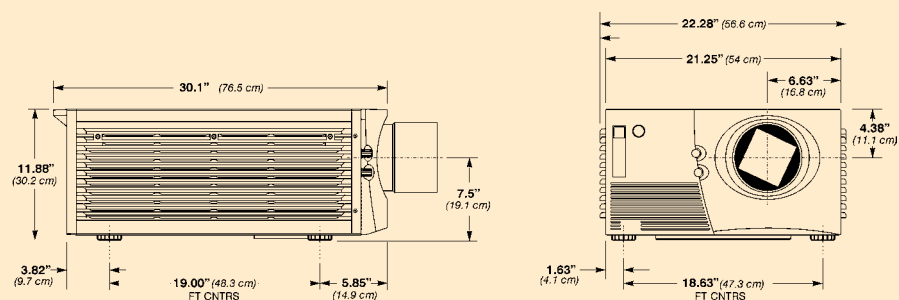

Rear view of Vista X5 showing LCD display panel and inset keypad

- ▶ 5000 ANSI lumens
- ▶ True XGA resolution
- ▶ Vertical & Horizontal scaling
- ▶ Electronic keystone
- ▶ Modular architecture
- ▶ Inexpensive upgrade path
- ▶ Upgradeable to true SXGA resolution

- ▶ Advanced inverse telecine digital processing
- ▶ Superior image quality
- ▶ Xenon illumination system
- ▶ LiteLOC™ light output control
- ▶ Low noise level
- ▶ Intuitive graphical user interface
- ▶ Wide range of optional lenses