

# DRAPER

www.draperinc.com  
draper@draperinc.com

411 South Pearl St.  
Spiceland, Indiana  
U.S.A. 47385-0425  
Tel. 765/987-7999  
Fax 765/987-7142


## VIC-12

### Video Interface Control

#### Technical Data Sheet

- USES:** The VIC-12 replaces the standard single-station control switch for all screens or shades where a 12 volt trigger circuit is turned on to lower the product, and turned off to raise the product.
- COMPATIBILITY:** The VIC-12 is intended as the sole control, and cannot be used with any other control, except the optional override switch (VIC-OS).
- CONTACTS:** Single-Pole, Double-Throw (Common, Normally Closed, Normally Open).
- RATING:** Contacts: 240 Volts, 7 A; 30 VDC, 7 A, UL recognized, CSA recognized.  
Coil: 12 VDC
- DESCRIPTION:** A relay with COM/NC/NO contacts, and a 12 V coil, housed in a metal box. Box measures 3" x 4" x 5" and has three pigtails leading from it:
- A 7-1/2 ft. black cord with 3-pronged plug for constant 115 VAC.
  - Two 22" wire leads (orange & brown) for switched 12 VDC.
  - Four 6" wire leads for the motor: blue, red, white, green (up, down, neut., grnd).

#### ILLUSTRATION:

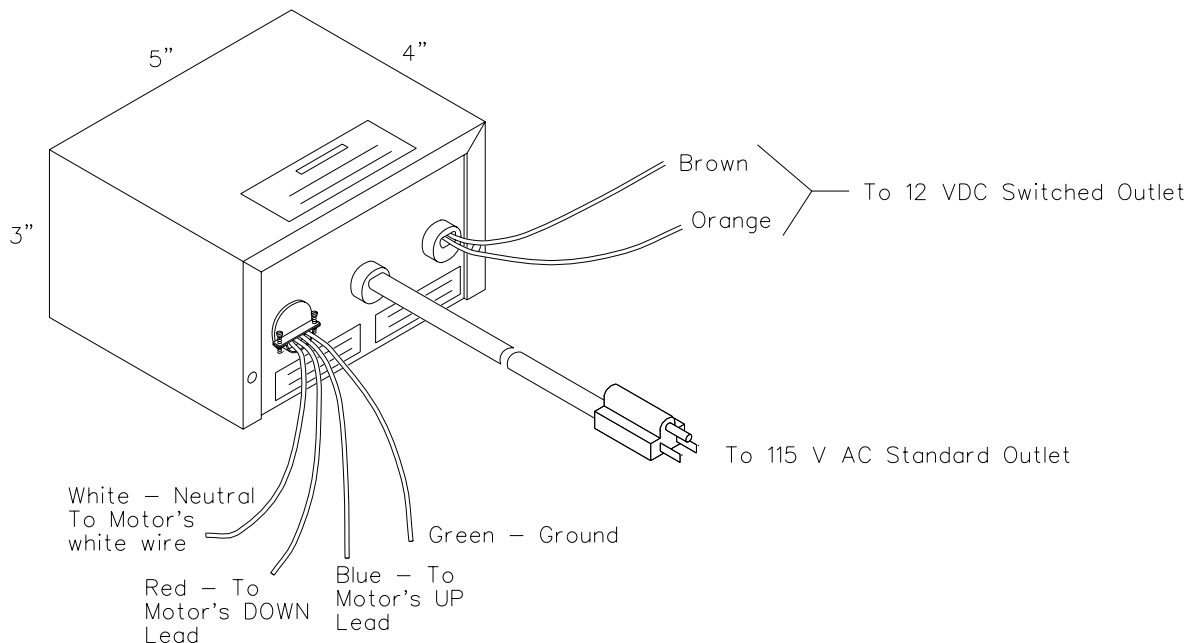

**ISSUED:** 5-12-98