

2 Series

MicroPortable LCD Projector



CP-S225W

1100 ANSI Lumens

- Native SVGA Resolution
(1024 x 768 compressed)
- 5 lbs.
- RGB, Component, Composite, S-video Inputs
- Manual Zoom / Manual Focus
- HDTV Theater Ready
- Short Throw Lens
- 32 dB (Whisper Mode)
- Digital Keystone Correction

HITACHI
Inspire the Next

CP-S225W Micro-Portable LCD Projector

Model	CP-S225W
--------------	-----------------

Performance Specifications

Liquid crystal panel structure	0.7" polysilicon active-matrix TFT x 3
Number of Pixels	480,000 pixels (V600 x H800)
Resolution	800 x 600 color pixels
Lens	Manual zoom 1: 1.2 (F2.0 - 2.3)
Lamp	150W UHB
Brightness	1,100 ANSI lumens (800 ANSI lumens in Whisper Mode)
Contrast ratio	200 : 1
Speakers	1W X 1
Power supply	AC90 - 132V / AC220 - 240V 50 / 60Hz
Power consumption	220W
Operating temperature	0° - 35° C (32° - 95° F)
Input signals	VGA, S-VGA, XGA (COMPRESSED), MAC13", MAC16", NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, PAL60, SECAM, S-Video, HDTV (480i, 625i, 480p, 1080i, 720p)
Noise level	36 dB (32 dB in Whisper Mode)

Input / Output Terminals


RGB input signal terminals	RGB	D-sub 15-pin shrink terminal x 1
	AUDIO	Mini jack x 1
Video signal input terminals	S-VIDEO	Min DIN 4-pin terminal x 1
	COMPOSITE	RCA jack terminal x 1
	COMPONENT	RCA jack Y, Cb, Cr / Y, Pb, Pr
	AUDIO	Mini jack x 1
Control terminals		D-sub 15-pins shrink terminal

Dimensions

(W x H x D)	10.9" x 2.4" x 8.3"
Weight	5 lbs.

Supplied Accessories

Remote control, Batteries, Power cord (U.S., UK, Euro), Video / audio cable, RGB cable, Multiple language operator's manual and Carry case

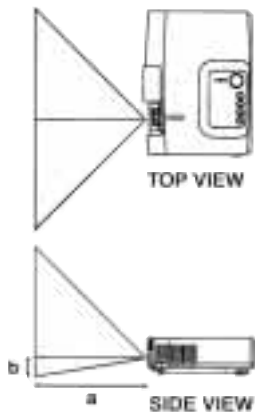

a: Distance from the LCD projector to the screen

The projection distance shown in the table below are for full size (800 X 600 dots)

b: Distance from the lens center to the bottom of the screen (a, b: + / -10%)

CP - S225W

Screen size (inches)	a (inches)		b (inches)
	Min.	Max.	
40	37	46	3
60	57	69	5
80	77	93	7
100	96	116	9
120	116	139	10
150	145	174	13
200	194	233	17

HITACHI

Hitachi America, Ltd.

Computer Division

2000 Sierra Point Parkway, MS:760

Brisbane, CA 94005-1835

Tel (800) 225-1741

Fax (650) 244-7776

Web Site: <http://www.hitachi.com/lcd>

For information on other Hitachi products:

1-800-HITACHI (800-448-2244)

Hitachi Canada, Ltd.

6740 Campobello Road

Mississauga, Ontario L5N 2L8

Tel (905) 821-4545

(800) 906-4482

Fax (905) 814-0848

Web Site: <http://www.hitachi.ca>

Specifications and product offerings are subject to change without notice ©2001 Hitachi America, Ltd. All rights reserved. Printed in US DS.CP-S225W.08.01