

LCD

Standard Portable LCD Projector



CP-X960WA & CP-S860W

2000 ANSI Lumens

- Native XGA & SVGA Resolution
- 13 lbs.
- 2 RGB Inputs & RGB Output
- Composite / S-video Inputs
- Power Zoom / Power Focus
- Picture - in - Picture
- Digital Keystone Correction
- Remote Controller with Laser Pointer

HITACHI
Inspire the Next

CP-X960WA & CP-S860W Standard Portable LCD Projectors

Model	CP-X960WA	CP-S860W
Performance Specifications		
Liquid crystal panel structure	1.3" polysilicon active-matrix TFT x 3	
Number of pixels	786,432 pixels (V768 x H1,024)	480,000 pixels (V600 x H800)
Resolution	1,024 x 768 color pixels	800 x 600 color pixels
Lens	Power zoom (F=1.7-2.3) 1:1.3 power focus	
Lamp	190W UHB	
Brightness	2,000 ANSI lumens	
Contrast ratio	200:1	
Speakers	1W + 1W (stereo)	
Power supply	AC100-120V / AC220-240V	
Power consumption	320W	
Operating temperature	0° - 35° C (32° - 95° F)	
Input signals	VGA, S-VGA, XGA, S-XGA (COMPRESSED), MAC13", MAC16", NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, SECAM, S-VIDEO	VGA, S-VGA, XGA (COMPRESSED), MAC13", MAC16", NTSC, NTSC 4.43, PAL, M-PAL, N-PAL, SECAM, S-VIDEO

Input / Output Terminals

Video signal input terminals	S-VIDEO	Min DIN 4-pin terminal x 1
	VIDEO	RCA jack terminal x 1
	AUDIO	RCA jack terminal x 1 (L/R)
RGB input signal terminals	RGB	D-sub 15-pin shrink terminal x 2
	AUDIO	Stereo mini jack x 2
RGB output signal terminals	RGB	D-sub 15-pin shrink terminal x 1
	AUDIO	Stereo mini jack x 1
Control terminals		D-sub 15-pin shrink terminals x 1


Dimensions

(W x H x D)	11.4" x 4.7" x 13.6"
Weight	13 lbs.

Supplied Accessories

Remote control with Laser Pointer, Batteries, Power cord (U.S., UK, Euro), Video / audio cable, MAC adaptor, Serial mouse cable, RGB cable, PS / 2 mouse cable, ADB mouse cable, Multiple language operator's manual

The values indicated assumes that the LCD projector's optical axis and screen are vertical

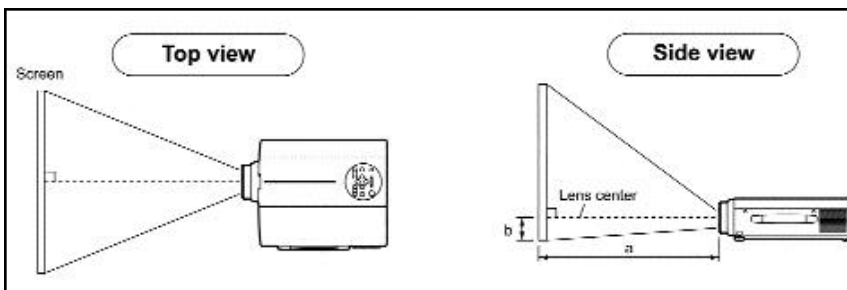

a: LCD projector to screen distance

b: Distance from lens center to screen top/bottom

Screen size (inches)	a (inches)		b (inches)
	Minimum	Maximum	
40	55	73	1
60	85	114	2
80	114	151	2
100	144	191	3
120	176	231	3
150	220	282	4
200	291	386	6

HITACHI

Hitachi America, Ltd. Computer Division

2000 Sierra Point Parkway, MS:760
Brisbane, CA 94005-1835
Tel (800) 225-1741
Fax (650) 244-7776

Web Site: <http://www.hitachi.com/lcd>
For information on other Hitachi products:
1-800-HITACHI (800-448-2244)

Hitachi Canada, Ltd.

6740 Campobello Road
Mississauga, Ontario L5N 2L8
Tel (905) 821-4545
(800) 906-4482
Fax (905) 814-0848
Web Site: <http://www.hitachi.ca>

Specifications and product offerings are subject to change without notice ©2001
Hitachi America, Ltd. All rights reserved. Printed in US DS.CP-X960W / CP-S860W.08.01