

TECHNICAL DATA SHEET - ADAPTER BRACKET




MODELS: PLP FUJ42, PLP FUJ4211, PLP HT42, PLP JVC42, PLP MITSU40, PLP NEC42, PLP NECPD1, PLP PAN42, PLP PHIL1, PLP PHIL42, PLP PION40, PLP PION50, PLP PS32, PLP PS42, PLP SA32, PLP SM50, PLP SONY1, PLP SONY 2, PLP SONY32, PLP SONY32PRO, PLP SONY42, PLP SPO42, PLP ZEN42, PLP ZN40, PLP V200



Dedicated adapter bracket used with various styles of plasma mounts.

Features:

- Includes mounting hardware to attach adapter bracket to plasma
- Finish is scratch resistant black fused epoxy

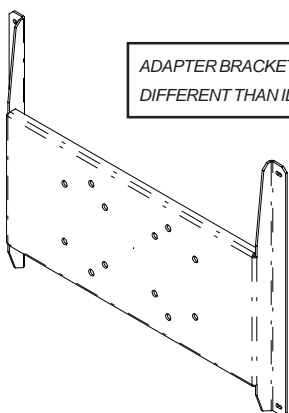

ADAPTER BRACKET MAY BE
DIFFERENT THAN ILLUSTRATED.

	Weight:	Shipping weight:
PLP FUJ42	12.6 lbs. / 5.7 kg.	13.6 lbs. / 6.2 kg.
PLP FUJ4211	6.12 lbs. / 2.8 kg.	7.12 lbs. / 3.2 kg.
PLP HT42	3.94 lbs. / 1.8 kg.	4.74 lbs. / 2.2 kg.
PLP JVC42	5 lbs. / 2.3 kg.	6 lbs. / 2.7 kg.
PLP MITSU40	5 lbs. / 2.3 kg.	6 lbs. / 2.7 kg.
PLP NEC42	4.6 lbs. / 2.1 kg.	5.6 lbs. / 2.5 kg.
PLP NECPD1	5.24 lbs. / 2.4 kg.	6.24 lbs. / 2.8 kg.
PLP PAN42	5 lbs. / 2.3 kg.	6 lbs. / 2.7 kg.
PLP PHIL1	19.69 lbs. / 9 kg.	20.69 lbs. / 9.4 kg.
PLP PHIL42	6.96 lbs. / 3.2 kg.	7.96 lbs. / 3.6 kg.
PLP PION40	19.96 lbs. / 9.1 kg.	20.96 lbs. / 9.5 kg.
PLP PION50	7.65 lbs. / 3.5 kg.	8.65 lbs. / 4 kg.
PLP-PS32	6.34 lbs. / 2.9 kg.	7.18 lbs. / 3.3 kg.
PLP-PS42	4.5 lbs. / 2 kg.	5.2 lbs. / 2.4 kg.
PLP SA32	3.22 lbs. / 1.5 kg.	4.07 lbs. / 1.8 kg.
PLP SM50	7.9 lbs. / 3.6 kg.	8.86 lbs. / 4 kg.
PLP SONY1	4.67 lbs. / 2.1 kg.	5.67 lbs. / 2.6 kg.
PLP SONY2	8.8 lbs. / 4 kg.	9.5 lbs. / 4.3 kg.
PLP SONY32	4.5 lbs. / 2 kg.	5.2 lbs. / 2.4 kg.
PLP SONY32PRO	5.0 lbs. / 2.3 kg.	5.6 lbs. / 2.5 kg.
PLP SONY42	10 lbs. / 4.6 kg.	11 lbs. / 5 kg.
PLP SPO42	13.5 lbs. / 6.14 kg.	14.2 lbs. / 6.5 kg.
PLP ZEN42	6.59 lbs. / 3 kg.	7.3 lbs. / 3.3 kg.
PLP ZN40	4 lbs. / 1.8 kg.	5 lbs. / 2.3 kg.
PLP V200	3.9 lbs. / 1.8 kg.	4.6 lbs. / 2.1 kg.

Maximum Load Capacity: 150 lbs. / 68 kg.

ARCHITECTSSPECIFICATIONS:

The plasma adapter plate shall be a Peerless model _____ and shall be used in combination with Peerless model _____. It shall be constructed of heavy gauge cold rolled steel. The finish shall be scratch resistant black fused epoxy. Assembly and installation shall be done according to instructions provided by the manufacturer.

Peerless Industries, Inc.
1980 Hawthorne Ave. Melrose Park, IL 60160
708-865-8870 800-865-2112 Fax 708-865-2941
www.peerlessindustries.com

ISSUED: 05-21-01 SHEET NO: 200-9626-3 07-09-02

©2002 Peerless Industries, Inc. All rights reserved.
Peerless is a registered trademark of Peerless Industries, Inc.