




EXECUTIVE® ELECTROL®

Automatic Electric Projection Screen Model

SPECIFICATION DATA

DA-LITE SCREEN COMPANY, INC.
 3100 North Detroit Street
 Post Office Box 137
 Warsaw, Indiana 46581-0137
 Phone: 574/267-8101
 800-622-3737
 Fax: 574/267-7804
 http://www.da-lite.com
 e-mail: info@da-lite.com

SUGGESTED SPECIFICATIONS: _____ projection screens, _____ (H) x _____ (W), electrically operated 120 volt AC (60 Hz) 2.9 amp. Three wire quick reversal motor especially designed for the purpose, to be ball bearing and oiled for life. With automatic thermal overload cut-out and integral interlocking gears. To have pre-set but accessible limit switches to automatically stop screen surface in the "up" and "down" positions. Stop action to be positive to prevent coasting. The roller to be of rigid metal at least 3" in diameter (to be used on screens 10' and under in width) or 5-3/4" in diameter (on screens over 12' in width). Roller to be mounted on two heavy duty brackets equipped with self-aligning bearings. Screen surface to be flame retardant and mildew resistant, Matte White, Glass Beaded or High Power with black masking borders standard. Case to be of wood, with double top for extra rigidity and sound deadening. Motor compartment to be metal lined. A section of the bottom of the case shall be equipped with hinges and connected to the drive mechanism so that it opens and closes automatically with the lowering and raising of the screen surface. Balance of the bottom panel shall be pegged to manual opening to provide access. Hinges shall be mounted to allow matching of the bottom panel to the ceiling. **Specify Type 1 and 2 or Type 3 hinge, as required.** Case to be furnished with a primer coat, ready to accept final finish by others. To be complete with 3 position control switch in box with cover plate. Recessed installation requires access to motor. Screen shall be listed by Underwriters' Laboratories and CSA. 

Matte White: Seamless in all standard sizes.

Glass Beaded: When both the height and width exceed 96", screen surface will have one or more horizontal seams.

High Power: Available in sizes up to and including 9' by 12'. Horizontal seams required when both dimensions exceed 6'.

DIMENSIONS

| Sizes | | *Overall Length of Case | | Approx. Shipping Weight | |
|-------------|-----------|-------------------------|-----|-------------------------|--------|
| H x W | Cm | In. | Cm | Lbs. | Kg |
| 50" x 50" | 127 x 127 | 76-1/2" | 194 | 144 | 65.32 |
| 60" x 60" | 152 x 152 | 86-1/2" | 220 | 154 | 69.85 |
| 70" x 70" | 178 x 178 | 96-1/2" | 245 | 164 | 74.39 |
| 84" x 84" | 213 x 213 | 110-1/2" | 280 | 184 | 83.46 |
| 6' x 8' | 183 x 244 | 122-1/2" | 310 | 209 | 94.80 |
| 8' x 8' | 244 x 244 | 122-1/2" | 310 | 211 | 95.71 |
| 7' x 9' | 213 x 274 | 134-1/2" | 342 | 234 | 106.14 |
| 9' x 9' | 274 x 274 | 134-1/2" | 342 | 237 | 107.50 |
| 8' x 10' | 244 x 305 | 146-1/2" | 372 | 260 | 117.94 |
| 10' x 10' | 305 x 305 | 146-1/2" | 372 | 263 | 119.30 |
| 9' x 12' | 274 x 366 | 170-1/2" | 433 | 311 | 141.07 |
| 12' x 12' | 366 x 366 | 170-1/2" | 433 | 316 | 143.34 |
| 10'6" x 14' | 320 x 427 | 194-1/2" | 494 | 403 | 182.80 |
| 14' x 14' | 427 x 427 | 194-1/2" | 494 | 410 | 185.98 |
| 12' x 16' | 366 x 488 | 218-1/2" | 555 | 459 | 208.70 |
| 16' x 16' | 488 x 488 | 218-1/2" | 555 | 469 | 212.74 |


***NOTE:** Add 7" to overall case length for mounting brackets.

ALL SIZES: Case width 9-1/2", case height 12-1/16".

Overall case length dimensions ± 1/4".

Specifications subject to change without notice.

Detail dimensional drawings, wiring diagrams and installation instructions available upon request.

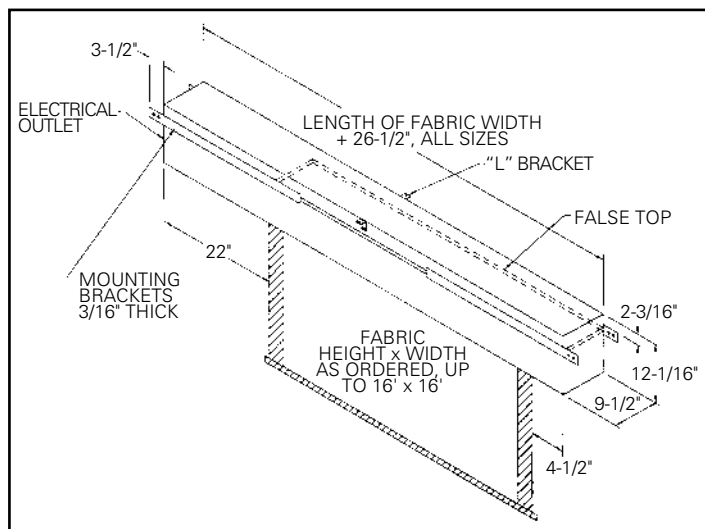

WHEN ORDERING, MARK APPROPRIATE SELECTIONS:

Select method of installation:

- Type 1 and 2 - Offset or Flush Mounting
- Type 3 - Extended Mounting

Select viewing surface:

- Matte White
- Glass Beaded
- High Power


Options:

- Black "Extra Drop" to lower picture area more than normal. Maximum total drop 20' including picture area.
- White "Extra Drop" to lower picture area more than normal. Maximum total drop 20' including picture area.
- Single motor low voltage control (LVC), 3 button with one (1) Switch.
 - Radio Frequency Wireless Remote Control for LVC System.
 - Infrared Wireless Remote Control for LVC System.
- Locking Switch Cover Plate for 120V or LVC Switch.
- Key Operated Switch for 120V only (NOTE: cannot be used with low voltage system).
- No Borders (Black masking borders standard).
- 220 Volt (50 Hz) Motor.
- Video Projector Interface Control - 12V or 5V.
- External SCB-100 - RS-232 Serial Control Board
 - NET-100 Ethernet-Serial Adapter
 - MNC-100 Master Network Controller Software

Project: _____
 Architect: _____
 Phone: _____
 Contractor: _____
 Phone: _____
 Supervisor: _____
 Phone: _____
 Supplier: _____
 Date: _____
 Revised: _____

SUGGESTED METHODS OF INSTALLATION

INCLUDING MOUNTING BRACKETS

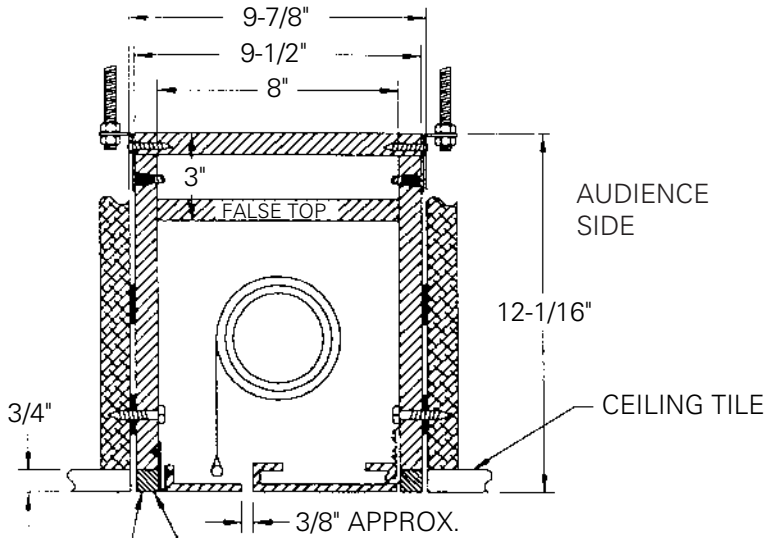


TYPE 1 AND 2

Offset mounting, recessed above ceiling, for plaster, dry wall or paneling. Door painted same finish as ceiling.

TYPE 1 AND 2

Allow 1/8" min. clearance all around surface door.

Flush mounting, recessed above ceiling. For use with 1/4" max. paneling or installation in existing ceiling using molding around door.

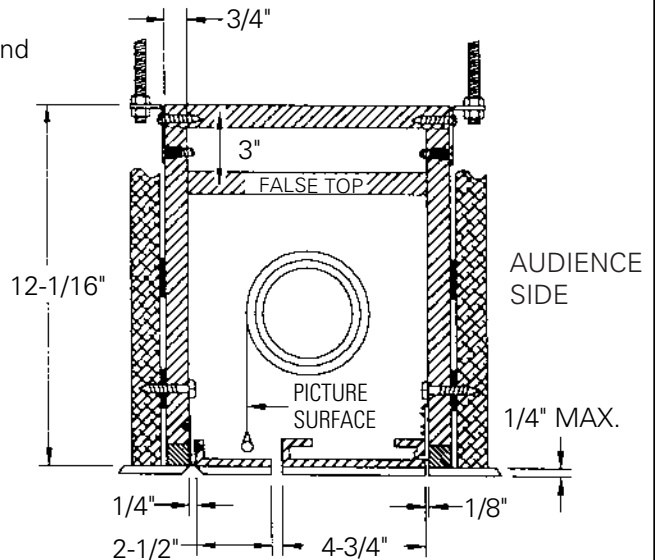

TYPE 3

Allow 1/4" min. clearance all around surface door.

Extended mounting, recessed above ceiling. For use with acoustical or other ceiling tile 3/4" thick laid over door.

