PLEASE READ

This manual is provided as a free service by Projector.com.


We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

ABOUT PROJECTOR.COM

Projector.com (<u>http://www.projector.com</u>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.



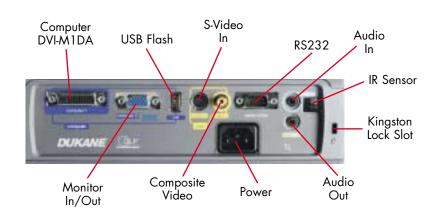



Plug your USB flash drive into the USB port connection and the 8759 does all the work for you.

Business Education



ImagePro 8759 Data/Video projector

- XGA resolution
- 2000 lumens brightness
- HDTV compatible
- DLP™ Technology by Texas Instruments
- Digital keystone correction, Vertical – automatic
- Automatic ceiling detection
- LCD with status Information
- USB flash connection



View the status of your projector via the LCD window on top of the unit.



ImagePro 8759 **Portable DLP projector**

A way to present your images anywhere

The Dukane ImagePro 8759™ offers best-in-class capabilities with intuitive controls. Combining unrivaled power, access, and simplicity together to give you the world's easiest to use digital projector. With it's USB flash connection you can go PC-free. Making it a flexible presentation solution. ĎLP™ technology delivers a clear crisp image and stunning contrast.

The high-end features mean that you do less work. Automatic vertical keystone correction, plus ceiling detection ensure your image is proper, with no work on your part. Automatic



synchronization with computer

and video sources allows for quick and smooth transitions.

Key features:

- Light weight
- 2000 lumens brightness
- XGA resolution
- DLP[™] technology by Texas Instruments
- Simple, icon based menu
- HDTV compatible
- Automatic ceiling detection
- Zoom lens
- USB flash connection
- LCD window with status information

8759 Image Size Distance Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
40	32	5.0	6.1
60	48	7.3	9.1
80	64	9.8	12.1
100	80	12.2	15.1
120	96	14.6	18.2
150	120	18.3	22.7
200	160	24.4	30.3

Throw Ratio (distance to width) 1.83 - 2.27





Audio Visual Products 2900 Dukane Drive St. Charles, Illinois 60174 www.dukcorp.com/av

Toll-free: 800-676-2485 Fax: 630-584-5156 avsales@dukcorp.com E-mail: ImagePro is a registered trademark of Dukane Corporation

Specifications

Image Element

Brightness

Resolution Contrast Scanning Frequency Lens Lens Throw Ratio

Keystone Correction Aspect Ratio Computer Compatibility

Video Compatibility

Image Control

Mouse Control **Projection Modes** Color Reproduction Lamp Lamp Life Audio Throw Distance Screen Size, diagonal 26" to 215" Inputs, Video

Inputs, Computer

Outputs Monitor Outputs,Control

Security

Safety

Fan Level Power

Size (WxHxD) Weight Carton Size Shipping Weight Accessories Included 8759

0.7" 12 degree DDR DDP2000 DLP by Texas Instruments, XGA 2000 ANSI lumens (1500 in whisper mode) 1024 x 768 pixels (H X V), XGA 1000:1 fh 31-85 kHz, fv 50-85 Hz Manual zoom and focus, 1.2x zoom 1.83 -2.27:1 throw distance to image width Digital, vertical +/-10 deg, Automatic 4:3, 16:9, selectable SVGA, VGA, XGA, and SXGA Compressed Mac 13" and Mac 16" NTSC, PAL, SECAM HDTV 1080i, 720p, 576p, 480p Freeze function, electronic magnification and pan Using M1 to USB Front/rear/ceiling 24 bit (16.7 million) 200W SHP 2000 hours, 3000 in whisper mode 1 speakers, 3 watt 60" to 395" (1) RCA, composite video (1) S-video, Min DIN 4-pin (1) RGB Signal: D-sub, 15 pin (shared) (1) M1-DA Computer (1) Audio, Stereo mini jack RGB Signal: D-sub, 15 pin (shared) PC control, RS232 USB Type A Audio out, Stereo mini jack Kensington slot and password protection 37 dB, 35 dB in whisper mode Operating Temperature 50 to 104 deg. F (0-35 deg C) AC 85-120V, AC200-240V 50/60 Hz, 260 watt 8.6" x 2.9" x 10.4" 5.2 lbs. 15" x 13" x 18" 15 lbs. Remote control, M1computer cable with USB mouse, audio cables, RCA video cable, power cord, cable straps operators manual, CDROM and soft carry case UL/CUL, FCC Class A **Optional Accessories** Lamp 456-8759 Ceiling mount, universal; PJF-UNV-S

Two (2) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year Peace-of-Mind Loaner Program.



#11652-H-04

PLEASE READ

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

ABOUT PROJECTOR.COM

Projector.com (<u>http://www.projector.com</u>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.