#### PLEASE READ

This manual is provided as a free service by Projector.com.


We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

#### ABOUT PROJECTOR.COM

Projector.com (<a href="http://www.projector.com">http://www.projector.com</a>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.



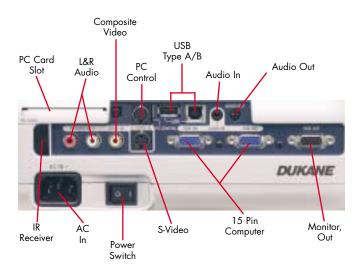

# ImagePro 8761 Portable DLP Projector

- 2500 lumen brightness
- XGA resolution
- 1600 to 1 contrast ratio
- $\bullet$  DLPTM technology by Texas Instruments
- Quiet operation
- PC card slot
- Wired and wireless LAN capability
- Operate up to 14 hours a day 7 days a week
- Sealed optics
- Keystone correction
- Password protection





8761 DUKANE

## ImagePro 8761 Portable DLP projector

The Dukane ImagePro 8761<sup>™</sup> is a versatile solution for the most demanding presentation requirements. Providing realistic colors, sharp contrast, and super bright images, the 8761 is sure to impress.

Bright enough for installation and light enough for travel, the easy-to-use ImagePro 8761 may be the only projector you'll ever need. It's specifically designed for high resolution computers and for displaying detailed information like financial data and graphics. It's ideal for

small- to large-sized business, school or government that needs a projector for meeting or conference rooms as well as portable display. It offers maximum brightness for large rooms as well or rooms with significant



ambient light. Best in it's class functionality ensuring that every presentation will be a winner.

#### **Key features:**

- 2500 lumen brightness
- XGA resolution
- 1600 to 1 contrast ratio
- DLP™ technology by Texas Instruments
- Quiet operation only 32dB, 29dB in whisper mode
- · PC card slot
- 2000 hour lamp life, 3000 hour in whisper mode
- Wide angle lens
- Remote control with laser pointer
- Keystone correction
- Wired and wireless LAN capability
- Sealed optics
- Password protection
- Operate up to 14 hours per day 7 days a week
- Three year warranty and Two year Peace -of- Mind service

### **DUKANE**

Dukane Corporation Audio Visual Products Division 2900 Dukane Drive

St. Charles, Illinois 60174

800-676-2485 toll-free 630-584-5156 fax avsales@dukcorp.com e-mail

www.dukcorp/av.com

ImagePro is a registered trademark of Dukane Corporation #11637-B-05

#### Specifications 8761

Image Element 0.69" 12 degree DDR DMD DLP by Texas Instruments, XGA

Brightness 2500 ANSI lumens (1900 in whisper mode)

Resolution 1024 x 768 pixels (H X V), XGA

Contrast 1600:1

Scanning Frequency fh 15-100 kHz, fv 50-120 Hz Lens Manual zoom and focus (f28.4-34.0),

1.2x zoom

Lens Throw Ratio 1.99 -2.42:1 throw distance

to image width

Keystone Correction

Digital, vertical +/-40 deg,
horizontal +/- 34 deg
Aspect Ratio
4:3, 16:9, selectable
Computer
SVGA, VGA, XGA, and

Computer SVGA, VGA, XGA, and Compatibility SXGA/UXGA Compressed Mac 13" and Mac 16"

Video Compatibility NTSC, NTSC 4.43, PAL, PAL-M,

PAL-N, PAL60, SECAM,

HDTV 1080i,1080i/50 Hz, 720p,

480i/p, PAL progressive/50 Freeze function, electronic

Image Control Freeze function, electronic magnification and pan

Mouse Control
Projection Modes
Color Reproduction
Lamp
Using USB
Front/rear/ceiling
24 bit (16.7 million)
220W NSH

Lamp 220W NSH
Lamp Life 2000 hours, 3000 in whisper mode

Audio 1 speakers, 1 watt Throw Distance 35.7" to 749.9" Screen Size, diagonal 30" to 500"

Inputs, Video (1) RCA, composite video, with L/R

RCA audio shared

(1) S-video, Min DIN 4-pin, with

RCA audio shared

Inputs, Computer (2) RGB Signal: D-sub, 15 pin

Audio, Stereo mini jack
 PC Card slot: PCMCIA type II

Outputs Monitor
Outputs, Control

PC control DIN 8 pin
Audio out, Stereo mini jack

USB Type A & B

Security Kensington slot and password

protection

Fan Level 32 dB, 29 dB in whisper mode Operating Temperature 32 to 95 deg. F (0-35 deg C)

AC 100-120V, AC200-240V 50/60 Hz, 280 watt

Size (WxHxD) 10.2" x 4.7" x 11.8"

Weight 7.2 lbs.

Power

Carton Size 14.2" x 14" x 17.3"

Shipping Weight 14.6 lbs.

Accessories Included Remote control, RGB cable,

power cord, USB cable,

operators manual, CDROM and

soft carry case.
UL/CUL, FCC Class B

Safety UL/CUL, FCC Class B Optional Accessories Lamp 456-8760

Ceiling mount, universal; PJF-UNV-S

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply).Includes Dukane's FREE 2 year *Peace-of-Mind Loaner Program*.

#### PLEASE READ

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

#### ABOUT PROJECTOR.COM

Projector.com (<a href="http://www.projector.com">http://www.projector.com</a>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.