

## **PLEASE READ**

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

## **ABOUT PROJECTOR.COM**


Projector.com (<http://www.projector.com>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.



## ImagePro 8768 Portable LCD Projector

- 3000 lumen brightness
- XGA resolution
- Easy to transport, only 7.9 lbs.
- Full connectivity
- PC card slot
- Monitor loopthrough
- Switched audio output
- Automatic keystone correction
- Lamp access on top for convenient replacement in ceiling mounted applications
- Enhanced security features

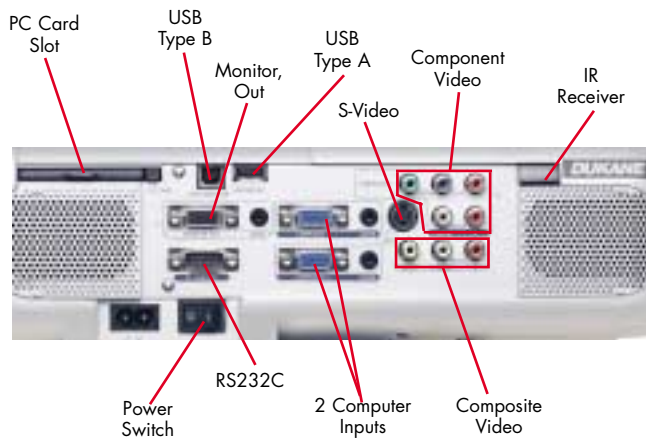

# 8768 DUKANE

# ImagePro 8768

## Powerful LCD projector

The Dukane ImagePro 8768 is a bright powerful projector that makes presentation setup fast and easy. automatic keystone correction, one touch source selection, and color coded input panel will ensure an impressive presentation every time.

This full-featured LCD projector is ideal for classrooms, conference rooms or other locations where a bright image is required. Use it as a portable or mount it on the ceiling.



### Key features:

- XGA (1024 x 768) resolution
- 3000 ANSI Lumens of brightness
- Vibrant rich colored images
- Easy carry 7.9 lbs.
- Flexibility with 2 computer and 3 video inputs
- Monitor loopthrough
- Full function remote with mouse/cursor control
- Audio output switches with selection of either video or computer source
- Enhanced security features
- HDTV Compatible
- "Silent Running" so you hear only your message
- Automatic vertical keystone correction
- Lamp access on top of projector for easy changing in ceiling mounted applications
- Three year warranty and One year Peace-of-Mind service

# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
800-676-2485  
630-584-5156  
avsales@dukcorp.com  
www.dukcorp/av.com



toll-free  
fax  
e-mail

ImagePro is a registered trademark of Dukane Corporation  
#11632-B-05

### Specifications 8768

|                                |   |
|--------------------------------|---|
| Image Element                  | 0.8" polysilicon TFT x 3, MLA   |
| Brightness                     | 3000 ANSI lumens<br>(2300 in whisper mode)  |
| Resolution                     | 1024 x 768 pixels (H X V), XGA  |
| Contrast                       | 400:1   |
| Scanning Frequency             | fh 15-100 kHz, fv 50-120 Hz   |
| Lens                           | Manual zoom and focus F1.7-2.0  |
| Lens Throw Ratio               | 1.5 -1.8:1 throw distance<br>to image width   |
| Keystone Correction            | Digital, vertical +/-40 deg,<br>automatic, horizontal +/- 35 deg  |
| Aspect Ratio                   | 4:3, 16:9, selectable   |
| Computer Compatibility         | SVGA, VGA, XGA, and<br>SXGA/UXGA Compressed<br>Mac 13" and Mac 16"  |
| Video Compatibility            | NTSC, NTSC 4.43, PAL, PAL-M,<br>PAL-N, PAL60, SECAM,<br>HDTV 1080i, 1080i/50 Hz, 720p,<br>576p, 480i/p  |
| Component Video, Image Control | Comp, horz res, 570TV line<br>Freeze function, electronic<br>magnification and pan  |
| Mouse Control                  | Using USB   |
| Projection Modes               | Front/rear/ceiling  |
| Color Reproduction             | 24 bit (16.7 million)   |
| Lamp                           | 200W AC   |
| Lamp Life                      | 2000 hours, 3000 in whisper mode  |
| Audio                          | 2 speakers, 5 watt  |
| Throw Distance                 | 28" to 430"   |
| Screen Size, diagonal          | 25" to 300"   |
| Inputs, Video                  | (1) Component, RCA x 3 w/<br>L/R Audio<br>(1) S-video, Min DIN 4-pin,<br>(1) Composite video, RCA x 1<br>(1) Audio, Stereo, RCA x 2, for<br>C-video shared<br>(1) Audio, Stereo, RCA x 2, for<br>S-video shared |
| Inputs, Computer               | (2) RGB Signal: D-sub, 15 pin<br>(2) Audio, Stereo mini jack for PC<br>(1) PC Card slot   |
| Outputs Monitor                | 15 pin, D-sub   |
| Outputs, Control               | PC control DIN 8 pin, RS-232<br>Audio out, Stereo mini jack<br>USB Type A & B   |
| Security                       | Kensington slot and<br>password protection  |
| Fan Level                      | 35 dB, 30 dB in whisper mode  |
| Operating Temperature          | 32 to 95 deg. F (0-35 deg C)  |
| Power                          | AC 100-120V, AC200-240V<br>50/60 Hz, 280 watt   |
| Size (WxHxD)                   | 13.4" x 4.2" x 10.2"  |
| Weight                         | 7.9 lbs.  |
| Shipping Weight                | 14.0 lbs.   |
| Carton Size                    | 14" x 11" x 18"   |
| Accessories Included           | Remote control, RGB cable, power<br>cord, USB cable, operators manual,<br>CD and soft carry case.   |
| Safety                         | UL/CUL, FCC Class B   |
| Optional Accessories           | Lamp 456-8768<br>Ceiling mount, universal; PJF-UNV-S  |

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

# 3YR

## **PLEASE READ**

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

## **ABOUT PROJECTOR.COM**

Projector.com (<http://www.projector.com>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.