

PLEASE READ

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

ABOUT PROJECTOR.COM

Projector.com (<http://www.projector.com>) is your review and buying guide resource for DLP and LCD video projectors.



Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.



"This Projector is out of the way"
 A New Concept in Projection!

ImagePro 9066
 Revolutionary Mirrored Projector
Place your Projector Under the Screen

- 3000 to 1 Contrast Ratio
- Aspheric Mirrors and Power Focus
- 1500 lumen brightness
- XGA resolution
- Image Size 40"-100" Diagonal
- Short Throw Distance 2.5"-25.9" (About 2 ft. Max. Distance)

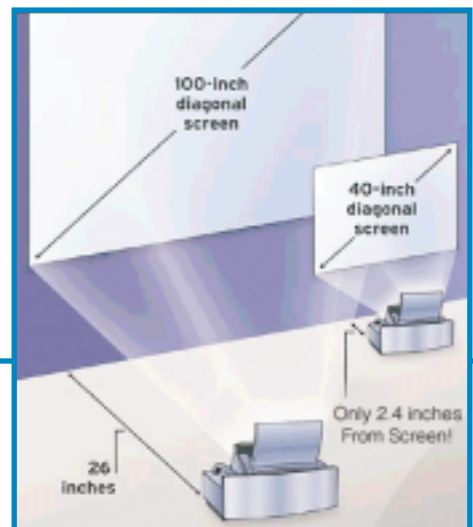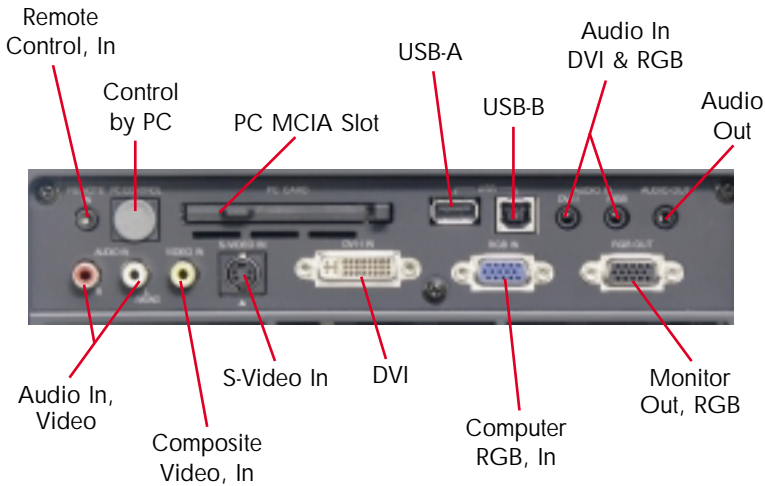

9066
DUKANE



ImagePro 9066

Short Throw Multi-Media LCD projector

Great Data and Super Video Images

The **ImagePro 9066** mirrored projector features aspheric mirrors instead of a traditional projection lens. This exclusive technology provides the shortest throw distance imaginable. Achieve a 40" diagonal image while only 3" from the screen or an image of up to 100" from less than 26" away. It is perfect for retail environments where space is limited or in classrooms and conference rooms, offering the presenter the freedom to utilize the full area without fear of blocking the projected image.

Featuring enhanced keystone correction, automatic color correction, and single touch adjustment technologies, your images will be sharp and clear. Also, through the wireless/wired LAN capabilities, you will be able to present in real time as well as control and monitor the projector remotely and receive updates via e-mail on vital projector functions.

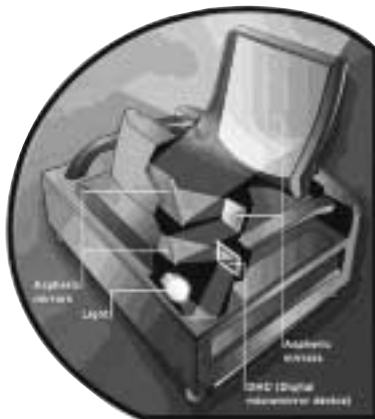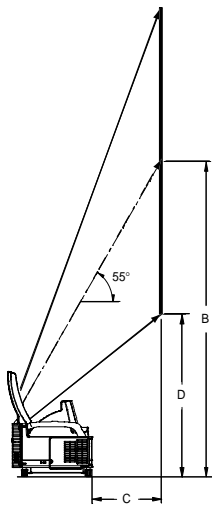

Distance chart for 4:3 screen sizes

Image Size (4:3)			B	C	D
Diagonal	Width(H)	Height(V)			
inches	inches	inches	inches	inches	inches
40	32	24	26.0	2.5	14.0
60	48	36	37.0	10.3	19.0
67	53.6	40.2	40.8	13.1	20.7
72	57.6	43.2	43.6	15.0	22.0
84	67.2	50.4	50.2	19.7	25.0
90	72	54	53.5	22.0	26.5
100	80	60	59.0	25.9	29.0

Specifications

9066	Single chip 12 degree DMD
Image Element	1500 ANSI lumens (1200 eco-mode)
Brightness	1024 x 768 XGA (H X V) up to
Resolution	UXGA with Advanced Compression
Contrast	3000 to 1
Scanning Frequency	15-100 kHz Horizontal 50- 120 kHz Vertical
Optical System	Four Curved Mirrors, Power Focus
Throw Distance	Image above mirrors and very large Distance 2.5" to 26"
Keystone Correction	Full correction ± 5° Horz -5° Vert
Aspect Ratio	Selectable
Computer Compatibility	SVGA, VGA, XGA, plus SXGA to UXGA Compressed, Mac 13" and Mac 16"
Video Compatibility	NTSC, NTSC 4.43, PAL,PAL-M, PAL-N, PAL60, SECAM, HDTV 1080i, 720p, 480p, 480i
Component Video, Image Control	Component, Y/Cb/Cr, 800 TV lines Freeze function, electronic magnification and pan
Projection Modes	Front/rear/ceiling
Pixel clock Frequency	135 MHz
Color Reproduction	24 bit (16.7 million)
Lamp	220W NSH
Lamp Life	2000 hours (typical) 3000 hours Eco-Mode
Audio	2 speakers x 1 watt
Inputs	(1) DVI-I, 24 pin (1) RGB, 15 pin Mini D-Sub with Component Option (1) S-Video, 4 pin Mini DIN (1) Video,Composite, RCA (1) PC Card Solt, PCMCIA (2) Stereo Mini Audio for DVI & RGB (1) RCA Audio x 2 for Video or S-Video
Outputs	(1) RGB, 15 pin for Monitor (1) Stereo Mini, Audio out
Outputs,other	(1) USB for Mouse control, Type B (1) Remote Control In, Mini Jack (1) PC Control of Projector, DIN 8 Pin (1) USB, TypeA, for Projector Control by Mouse
Operating Range	41° to 95° F / 5 to 35 deg. C
Security	Password Access Control
Fan Level	37dB, normal, 32db Eco-Mode
Power	AC 100-120V, AC200-240V 50/60 Hz, 290 watt, 0.6 watt idle
Size (WxHxD)	15" x 12.3" x 12.3"
Weight	13 lbs.
Shipping Weight	21.4 lbs.
Carton Size	18.5" x 13" x 19"
Accessories Included	User's manual, wired/wireless remote control, VGA D-sub signal cable, DVI-D signal cable, DVI-A - D-sub signal cable, audio cable, USB A-B cable, power cable, set up guide
Safety	UL, 1950 FCC Class B, CSA 950 (C-UL)
Accessories	Lamp 456-9066; Soft Case 128-57

Three (3) year limited warranty on parts and labor in North America, lamp excluded (for other locations, local warranties apply). Includes Dukane's FREE 1 year *Peace-of-Mind Loaner Program*.

DUKANE

Audio Visual Products
2900 Dukane Drive
St. Charles, Illinois 60174
www.dukcorp.com/av



Toll-free: 800-676-2485
Fax: 630-584-5156
E-mail: avsales@dukcorp.com

ImagePro is a registered trademark of Dukane Corporation #11621-B-05

3YR

PLEASE READ

This manual is provided as a free service by Projector.com.

We are in no way responsible for the contents of the manual. We do not guarantee its accuracy and we do not make any claim of copyright. The copyright remains the property of their respective owners.

ABOUT PROJECTOR.COM

Projector.com (<http://www.projector.com>) is your review and buying guide resource for DLP and LCD video projectors.

Visit the site to read the latest projector news and reviews, read and comment on projector specifications, download user manuals and much more.